


# Sherwood V



Colour included  
in the price

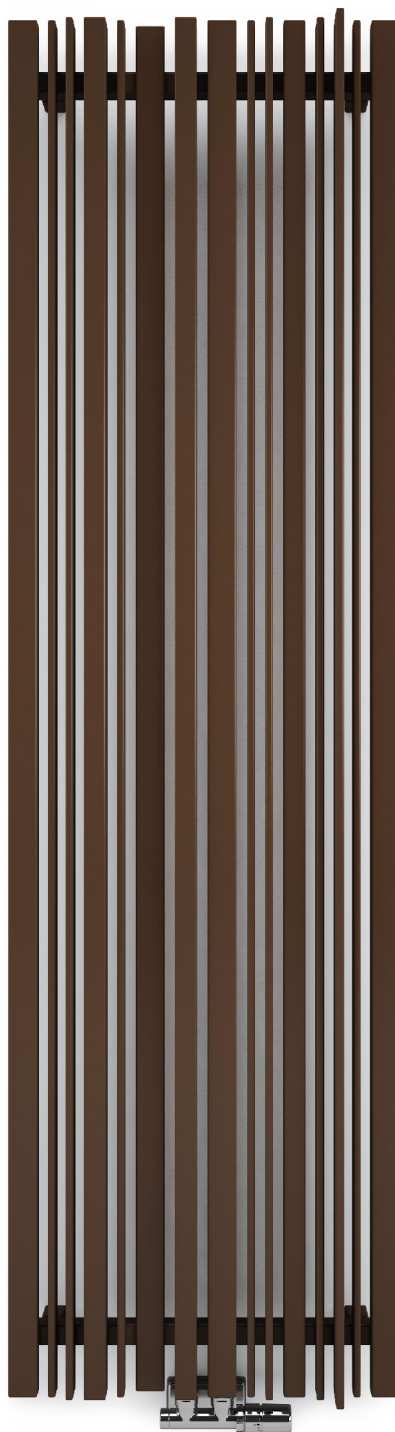

Sherwood V 1900 x 540  
colour: RAL 8014

Integrated thermostatic valve, angled, left, chrome  
SLIM thermostatic head, chrome  
Integrated pipe-masking set, chrome


# Sherwood V



Colour included  
in the price

design: Jacek Ryń

## Connections:



## We recommend:


ZIP V hanger



SIM heating element



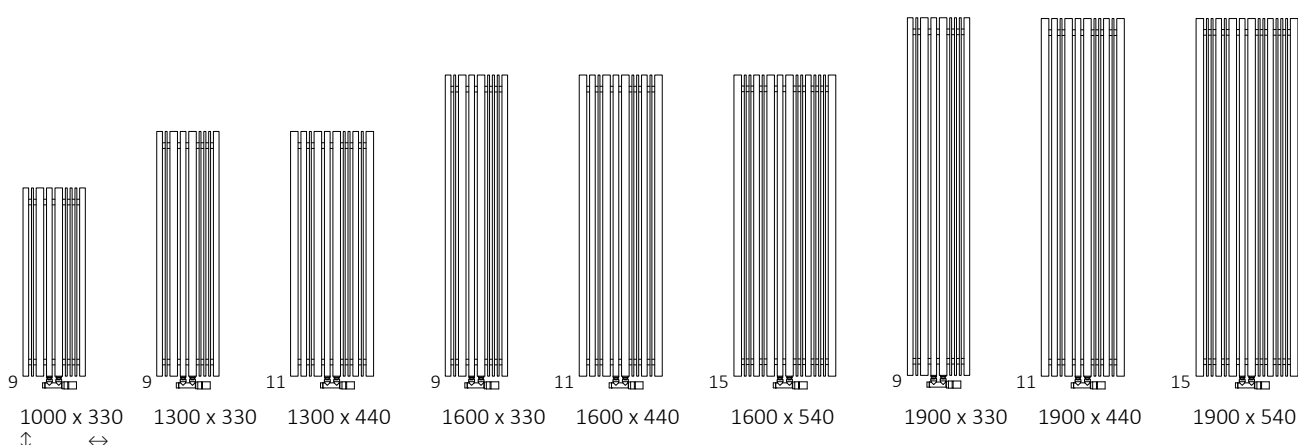


## Available sizes:



## Specifications:

Working pressure: 0,7 MPa    Maximum operating temperature: 95°C

A ↓	B ↔	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm <sup>3</sup> ]	 [kg]	Product Code <a href="#">Configuration codes. 4</a>
1000	330	50	478	242	600	220	850	75	5,53	13,18	WGSTV100033
1300	330	50	602	303	600	220	1150	75	7,05	16,79	WGSTV130033
1300	440	50	803	404	800	330	1150	75	9,80	21,16	WGSTV130044
1600	330	50	727	365	800	220	1450	75	8,58	20,41	WGSTV160033
1600	440	50	969	486	1000	330	1450	75	11,92	25,69	WGSTV160044
1600	540	50	1190	597	1200	430	1450	75	13,45	32,01	WGSTV160054
1900	330	50	851	427	800	220	1750	75	10,10	24,02	WGSTV190033
1900	440	50	1135	569	1200	330	1750	75	14,05	30,23	WGSTV190044
1900	540	50	1393	698	1500	430	1750	75	15,84	37,68	WGSTV190054


**Included components:** The radiator is sold with an integrated, angled thermostatic valve, SLIM thermostatic head and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.

# Sherwood V




Colour included  
in the price



**ZX**

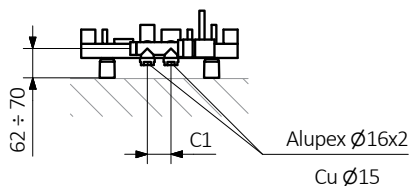

**Z1**

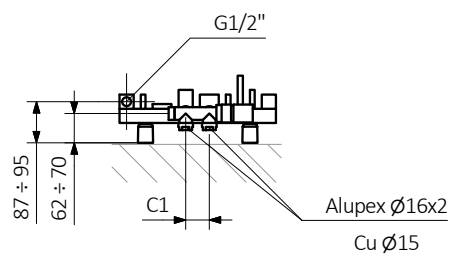


**Z8**

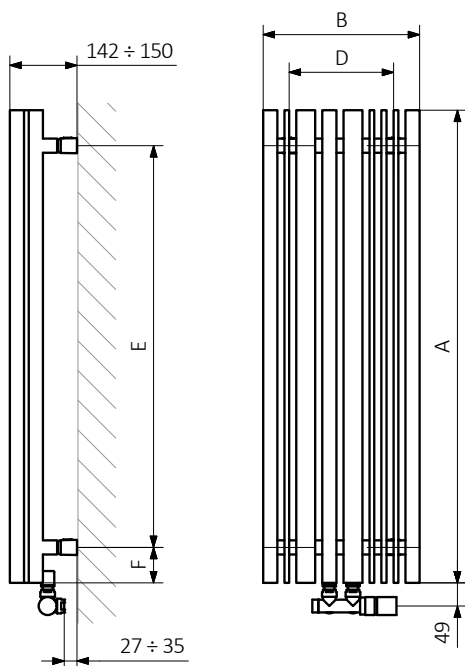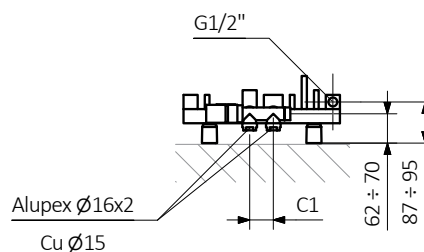


A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres  
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

**Collector:**

**Profile:**

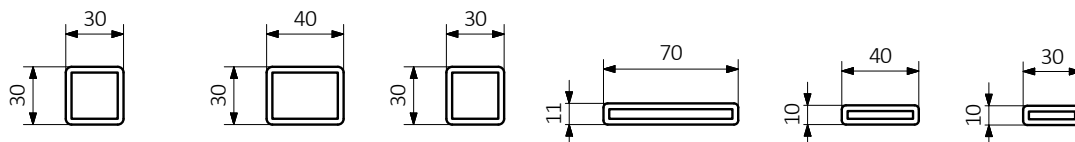



Colour included  
in the price

Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

K916SX

PRODUCT CODE  
(located in the table for the product)

CONFIGURATION CODE  
(supplemented by hand)

Configuration

K 916 SX

Package code   Colour code   Connection code  
*K – carton box*

Zinc powder primer

**C** – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** — *Extra processes or additions code*



Colour included  
in the price

## Legenda



Grzejnik dostępny także w wersji chromowanej.



Grzejnik dostępny w wersji c.o.



Grzejnik przystosowany do pracy jako grzejnik c.o. z podłączoną grzałką elektryczną.



Grzejnik dostępny w wersji elektrycznej z przewodem grzejnym lub z czynnikiem grzewczym i grzałką. Produkt fabrycznie przetestowany i gotowy do użytku.



Podstawowy wariant podłączenia grzejnika. Ikona wskazuje sposób zasilania oraz powrotu wody w danym podłączeniu oraz umiejscowienie wkładki termostatycznej oraz grzałki, jeśli istnieje możliwość ich zamontowania.



Typ podłączenia opcjonalnego dla danego grzejnika.



Moc grzejnika elektrycznego lub sugerowana moc grzałki przeznaczonej do grzejnika c.o.



Waga.



Pojemność.